


Litron Total Laser Capability  
LPY Lasers

# LPY600/700 Series High Energy Pulsed Nd:YAG Lasers

*Product Range Specification*

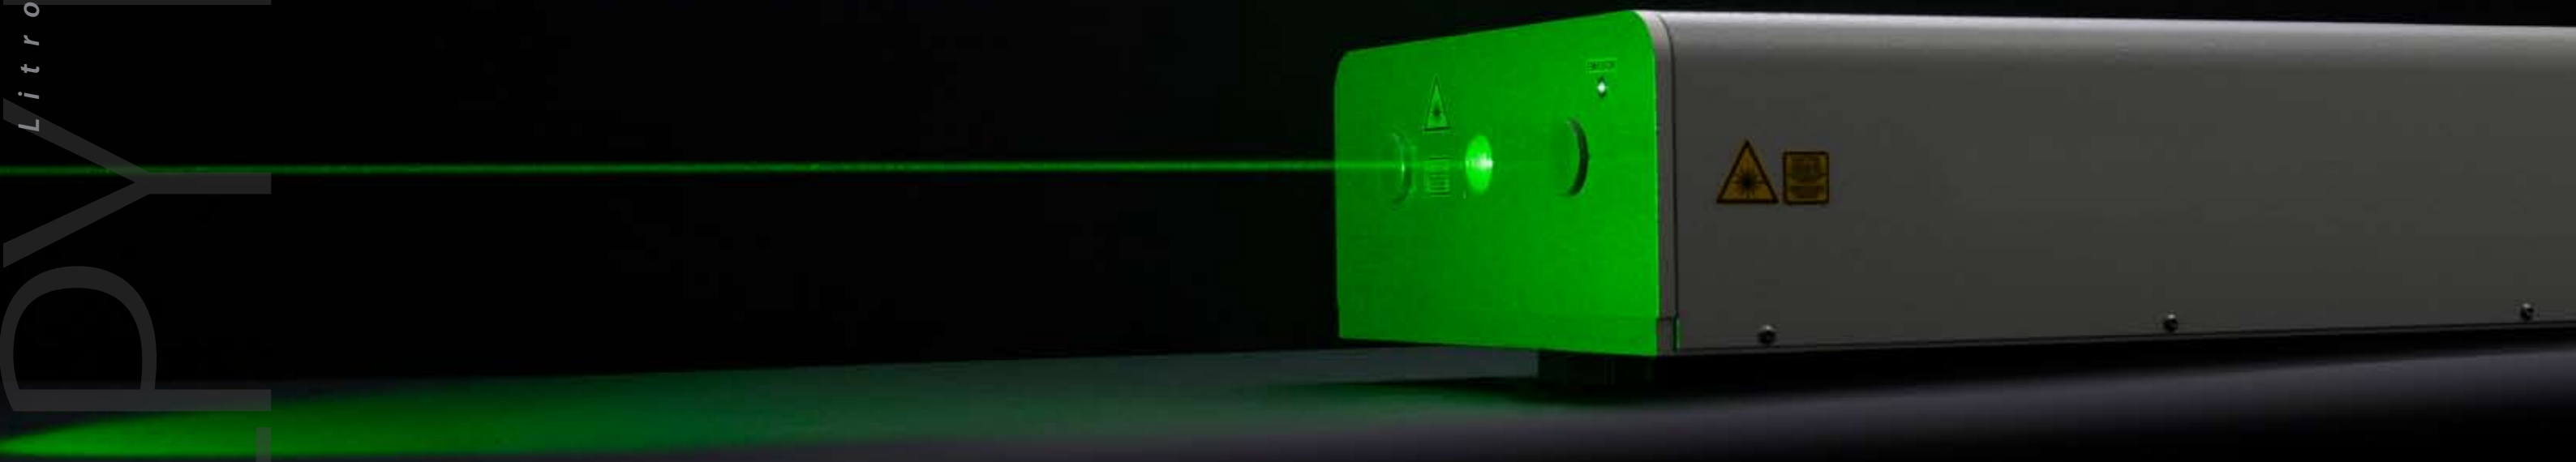

LPY•6/700 •••••

# LPY Range Specification Stable and Stable Telescopic Resonators

Model	LPY704-10	LPY 706-10	LPY664-10	LPY674-10	LPY764-10	LPY704-20	LPY706-20	LPY664-20	LPY674-20	LPY764-20	LPY704-30	LPY706-30	LPY764-30
<b>Repetition Rate (Hz)</b>	10	10	10	10	10	20	20	20	20	20	30	30	30
<b>Output Energy (mJ)</b>													
1064nm	420	650	850	1000	1250	380	600	800	850	1000	380	550	900
532nm	210	325	425	500	675	190	300	400	425	500	190	225	450
355nm <sup>(1)</sup>	80	100	130	160	200	70	85	110	130	140	50	80	150
266nm	50	70	95	110	120	50	65	75	80	90	45	60	80
<b>Pulse Stability (±%)</b>													
1064nm	2	2	2	2	2	2	2	2	2	2	2	2	2
532nm	3	3	3	3	3	3	3	3	3	3	3	3	3
355nm	4	4	4	4	4	4	4	4	4	4	4	4	4
266nm	6	6	6	6	6	6	6	6	6	6	6	6	6
<b>Parameter</b>													
Beam Diameter (mm)	6.5	8	8	9.5	8	6.5	8	8	9.5	8	6.5	8	8
Beam Divergence (mrad) <sup>(2)</sup>	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8	<0.8
M <sup>2</sup> @ 1064nm	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5	<3.5
Pulse Length @1064nm (ns)	6-10	6-10	6-10	6-10	6-10	6-10	6-10	6-10	6-10	6-10	8-10	8-10	8-10
Pointing Stability (µrad) <sup>(3)</sup>	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70	<70
Lamp Life (pulses) <sup>(4)</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>	5x10 <sup>7</sup>
Timing Jitter (ns) <sup>(5)</sup>	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<b>Services</b>													
Voltage <sup>(6)</sup> (VAC)	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250
Frequency <sup>(7)</sup> (Hz)	47-63	47-63	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 62	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Water Temp Max. (°C)	Air Cooled <sup>(8)</sup>	Air Cooled <sup>(8)</sup>	20	20	20	Air Cooled <sup>(8)</sup>	20	20	20	20	20	20	20
Inlet Pressure (bar)	n/a	n/a	2-5	2-5	2-5	n/a	2-5	2-5	2-5	2-5	2-5	2-5	2-5
PSU Type	LPU1000	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount

Model	LPY704-50	LPY742-50	LPY702-100	LPY704-100	LPY742-100	LPY702-150	LPY742-150	LPY702-200	LPY742-200	LPY604T-10	LPY604T-20	LPY642T-10	LPY642T-20	LPY642T-30
<b>Repetition Rate (Hz)</b>	50	50	100	100	100	150	150	200	200	10	20	10	20	30
<b>Output Energy (mJ)</b>														
1064nm	300	450	100	230	400	90	280	70	200	80	70	350	300	250
532nm	150	225	50	115	200	45	140	35	100	40	35	175	150	125
355nm <sup>(1)</sup>	40	80	20	20	70	12	30	10	30	20	15	80	70	65
266nm	20	35	10	15	20	7	18	6	10	15	10	40	30	25
<b>Pulse Stability (±%)</b>														
1064nm	2	2	2	2	2	2	2	2	2	2	2	2	2	2
532nm	3	3	3	3	3	3	3	3	3	3	3	3	3	3
355nm	4	4	4	4	4	4	4	4	4	4	4	4	4	4
266nm	6	6	6	6	6	6	6	6	6	6	6	6	6	6
<b>Parameter</b>														
Beam Diameter (mm)	6.5	6.5	6.5	6.5	6.5	5	5	6	6	6.5	6.5	6.5	6.5	6.5
Beam Divergence (mrad) <sup>(2)</sup>	2.5	2	2.5	2.5	2	2.5	2	3	2.5	0.8	0.8	0.8	0.8	0.8
M <sup>2</sup> @ 1064nm	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3	<1.3
Pulse Length @1064nm (ns)	8-10	8-10	10-12	15-18	15-18	15-18	15-18	15-18	15-18	6-10	6-10	6-10	6-10	6-10
Pointing Stability (µrad) <sup>(3)</sup>	<70	<70	<100	<100	<100	<100	<100	<100	<100	<70	<70	<70	<70	<70
Lamp Life (pulses) <sup>(4)</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	1.5x10 <sup>8</sup>	>10 <sup>7</sup>	>10 <sup>7</sup>	>10 <sup>7</sup>	>10 <sup>7</sup>	>10 <sup>7</sup>
Timing Jitter (ns) <sup>(5)</sup>	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<b>Services</b>														
Voltage <sup>(6)</sup> (VAC)	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250
Frequency <sup>(7)</sup> (Hz)	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Water Temp Max. (°C)	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Inlet Pressure (bar)	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5	2-5
PSU Type	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount

(1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.  
 (2) Full angle for 90% of the output energy.  
 (3) Full angle.  
 (4) Typical lifetime.  
 (5) Jitter is measured with respect to the Q-switch trigger input.  
 (6) 110VAC option requires autotransformer to be specified on order.  
 (7) 50 or 60Hz to be specified on order.  
 (8) Ambient Temperature 5-35°C. (0-80% non condensing atmosphere.)

# LPY Range Specification Gaussian Coupled Resonators

Model	LPY704G-10	LPY 706G-10	LPY707G-10	LPY674G-10	LPY764G-10	LPY776G-10	LPY787G-10	LPY704G-20	LPY706G-20	LPY707G-20	LPY674G-20	LPY764G-20	LPY776G-20	LPY787G-20
<b>Repetition Rate (Hz)</b>	10	10	10	10	10	10	10	20	20	20	20	20	20	20
<b>Output Energy (mJ)</b>														
1064nm	400	650	850	1000	1250	1600	2000	380	600	800	850	1000	1400	1800
532nm	200	325	435	500	675	820	1000	190	300	400	425	500	700	900
355nm <sup>(1)</sup>	80	110	150/230	250	225	320/490	400	70	90	130	150	140	280	380
266nm	50	70	105	110	125	160	195	45	65	75	80	90	140	180
<b>Pulse Stability (±%)</b>														
1064nm	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2
532nm	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4	<4
355nm	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6	<6
266nm	<8	<8	<8	<8	<8	<8	<8	<8	<8	<8	<8	<8	<8	<8
<b>Parameter</b>														
Beam Diameter (mm)	6	8	9.5	9.5	9.5	9.5	12.5	6	8	9.5	9.5	9.5	9.5	12.5
Beam Divergence (mrad) <sup>(2)</sup>	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
M <sup>2</sup> @ 1064nm	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2
Pulse Length @1064nm (ns)	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9	6-9
Pointing Stability (µrad) <sup>(3)</sup>	<50	<50	<50	<50	<50	<50	<50	<50	<50	<50	<50	<50	<50	<50
Lamp Life (pulses) <sup>(4)</sup>	>5x10 <sup>7</sup>	>5x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>5x10 <sup>7</sup>	>5x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>
Timing Jitter (ns) <sup>(5)</sup>	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
<b>Services</b>														
Voltage <sup>(6)</sup> (VAC)	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250	220-250
Frequency <sup>(7)</sup> (Hz)	47-63	47-63	47-63	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single	Single
Water Temp Max. (°C)	Air Cooled <sup>(8)</sup>	Air Cooled <sup>(8)</sup>	Air Cooled <sup>(8)</sup>	20	20	20	20	Air Cooled <sup>(8)</sup>	20	20	20	20	20	20
Inlet Pressure (bar)	n/a	n/a	n/a	2-5	2-5	2-5	2-5	n/a	2-5	2-5	2-5	2-5	2-5	2-5
PSU Type	LPU1000	LPU1000	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount

Model	LPY704G-30	LPY706G-30	LPY764G-30	LPY774G-30	LPY787G-30
<b>Repetition Rate (Hz)</b>	30	30	30	30	30
<b>Output Energy (mJ)</b>					
1064nm	380	550	900	1200	1500
532nm	190	225	450	600	750
355nm <sup>(1)</sup>	50	80	150	260	300
266nm	45	60	80	120	150
<b>Pulse Stability (±%)</b>					
1064nm	<2	<2	<2	<2	<2
532nm	<4	<4	<4	<4	<4
355nm	<6	<6	<6	<6	<6
266nm	<10	<10	<10	<10	<10
<b>Parameter</b>					
Beam Diameter (mm)	6	8	9.5	9.5	9.5
Beam Divergence (mrad) <sup>(2)</sup>	0.5	0.5	0.5	0.5	0.5
M <sup>2</sup> @ 1064nm	<2	<2	<2	<2	<2
Pulse Length @1064nm (ns)	6-9	6-9	6-9	6-9	6-9
Pointing Stability (µrad) <sup>(3)</sup>	<50	<50	<50	<50	<50
Lamp Life (pulses) <sup>(4)</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>	>3x10 <sup>7</sup>
Timing Jitter (ns) <sup>(5)</sup>	<0.5	<0.5	<0.5	<0.5	<0.5
<b>Services</b>					
Voltage <sup>(6)</sup> (VAC)	220-250	220-250	220-250	220-250	220-250
Frequency <sup>(7)</sup> (Hz)	47-63	50 or 60	50 or 60	50 or 60	50 or 60
Power Phase	Single	Single	Single	Single	Single
Water Temp Max. (°C)	Air Cooled <sup>(8)</sup>	20	20	20	20
Inlet Pressure (bar)	n/a	2-5	2-5	2-5	2-5
PSU Type	LPU1000	16U Rackmount	16U Rackmount	16U Rackmount	16U Rackmount

All LPY700 series systems feature a birefringence compensating twin rod oscillator design. The LPY600 series are single rod oscillator/oscillator-amplifiers.

(1) Higher conversion efficiency into 3rd harmonic available using Type 1 doubler.

(2) Full angle for 90% of the output energy.

(3) Full angle.

(4) Typical lifetime.





(5) Jitter is measured with respect to the Q-switch trigger input.

(6) 110VAC option requires autotransformer to be specified on order.




(7) 50 or 60Hz to be specified on order.

(8) Ambient Temperature 5-35°C. (0-80% non condensing atmosphere.)

# LPY Range Dimensions

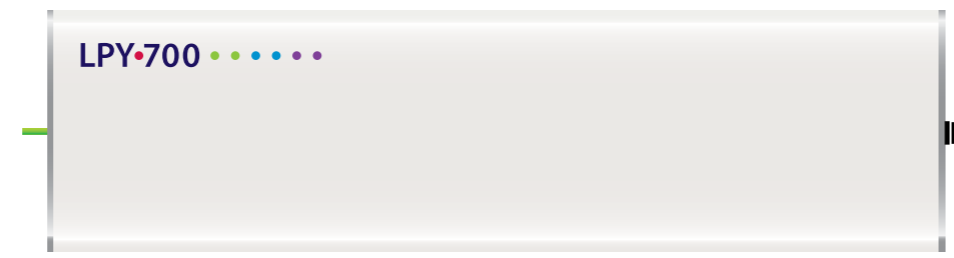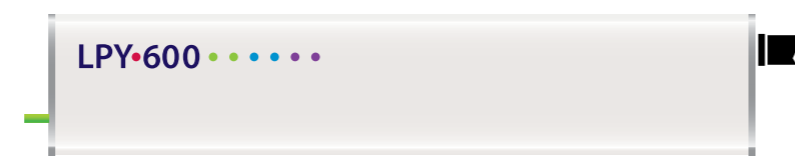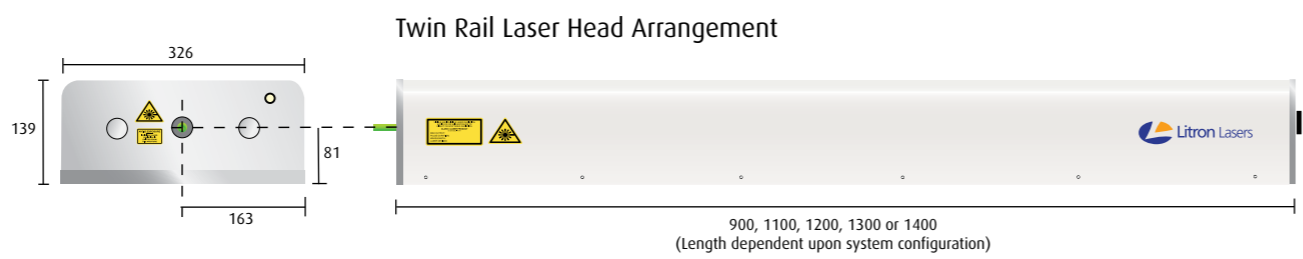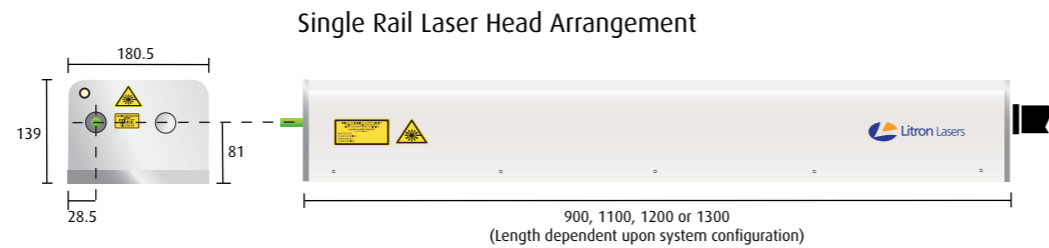

All dimensions shown in mm

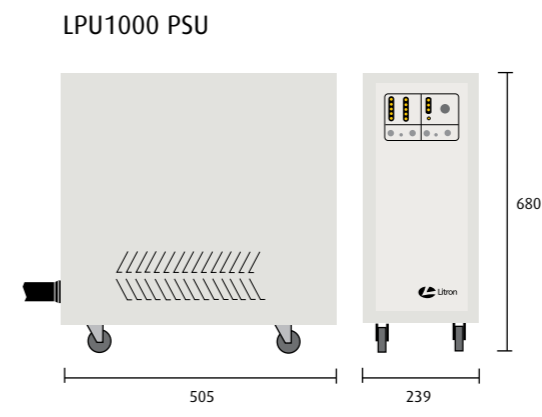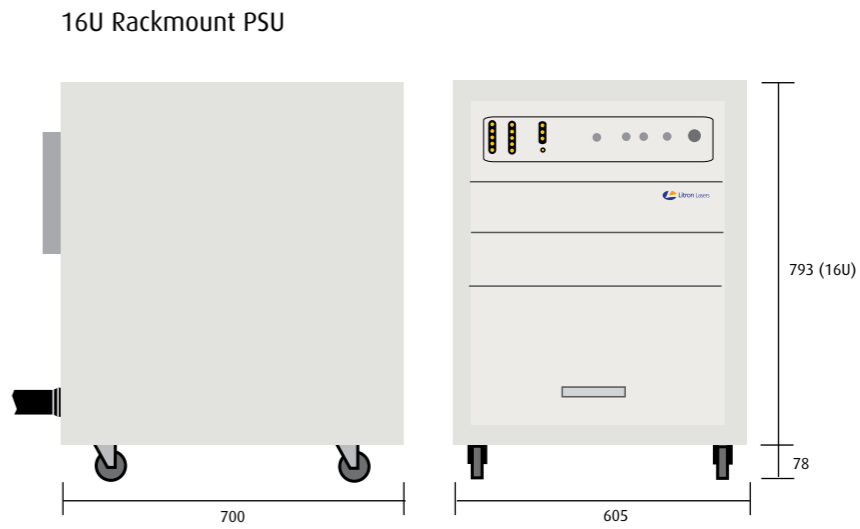

**HEAD OFFICE**  
**Litron Lasers Ltd**  
 8 Consul Road  
 Rugby  
 Warwickshire CV21 1PB  
 England

T +44 (0)1788 574444  
 F +44 (0)1788 574888  
 E sales@litron.co.uk

**NORTH AMERICAN OFFICE**  
**Litron Lasers North America**  
 2449 Arnica Drive  
 Bozeman  
 MT 59715  
 USA

T +1 (406) 522 7566  
 F +1 (406) 522 7567  
 E sales@litronlasers.com

[www.litronlasers.com](http://www.litronlasers.com)



Our policy is to improve the design and specification of our products. The details given in this document are not to be regarded as binding.